



Aluminium Door Panels



Expand your portfolio without investment

Made-to-measure

Customized

Different models

Cost effective



O.H. Industri A/S
Smedevej 17
7430 Ikast
Denmark


T: +45 9725 1200
F: +45 9725 1617
ohi@oh-industri.dk
www.oh-industri.com

Product Data

Specification	Thickness mm		U-Value W/m ² K	Weight kg/m ²	Min size mm	Max size mm
	Rebated	Total				


Flush Alu/Alu

Outside 1,5 mm Aluminum, powder coated
Core Polystyrene insulation
Inside 1,5 mm Aluminum, powder coated

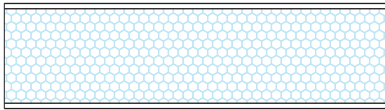

24	24	1.27	8.8	450 x 1,000	1,000 x 2,200
40	40	0.79	9.3		


Weight and U-Value will change depending on door design.
 Values are calculated based on OH-1001.
 Glass available in 40 mm thickness.

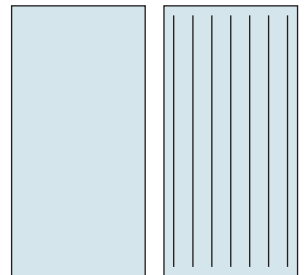

Thickness mm	
Rebated	Glass
40	32


Profiled Alu/Alu

Outside 1,5 mm Aluminum, powder coated
Core Polystyrene insulation
Inside 1,5 mm Aluminum, powder coated

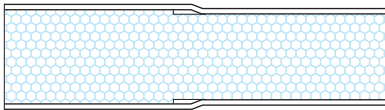

24	28	1.1	8.9	450 x 1,000	1,000 x 2,200
40	44	0.73	9.5		


Weight and U-Value will change depending on door design.
 Values are calculated based on OH-1002.
 Glass available in 40 mm thickness.

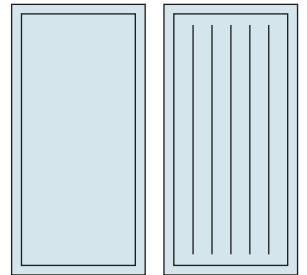

Thickness mm	
Rebated	Glass
40	36


Profiled Alu/MDF

Outside 1,5 mm Aluminum, powder coated
Core Polystyrene insulation
Inside 12 mm MDF painted

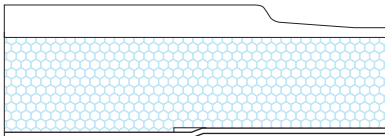

24	34	1.18	13.7	450 x 1,000	1,000 x 2,200
40	50	0.79	14.2		

Weight and U-Value will change depending on door design.
 Values are calculated based on OH-3018.
 Glass available in 24 mm and 40 mm thickness.

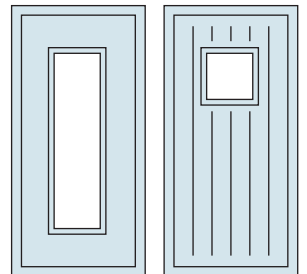


Thickness mm	
Rebated	Glass
24	22
40	38


More models:

Please request individual data sheets:


Model OH-1001

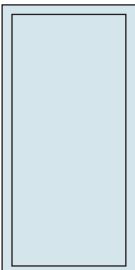


Model OH-1002

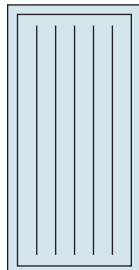


Model OH-3018

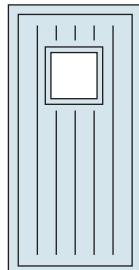


Model OH-3020

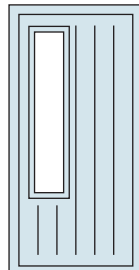

Model OH-2014

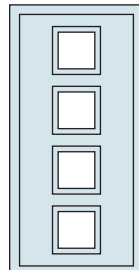

Model OH-2003

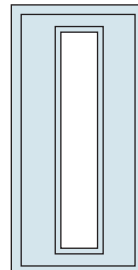

Model OH-2001

