

## Panels Compact laminate/Compact laminate

**Facing:** Outside: 4 mm Compact laminate  
Inside: 4 mm Compact laminate

**Core:** Insulation - XPS

**U-Value:**

U-Value - W/m <sup>2</sup> K									
28 mm	32 mm	36 mm	45 mm	48 mm	52 mm	54 mm			
1,27	1,10	1,98	0,78	0,73	0,67	0,64			

Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

**Weight:**

Weight appr. Kg./m <sup>2</sup>									
28 mm	32 mm	36 mm	45 mm	48 mm	52 mm	54 mm			
11,5	11,6	11,7	12,0	12,1	12,3	12,3			

**Performance:**

	Classification standards	Performance
Sound	EN 717-1	N/A
Fire	EN13501-1	N/A


**Measure:**

Min.: 120 x 250 mm - Max.: 1820 x 2080 mm

**Tolerances:**

Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

**Section drawing:**

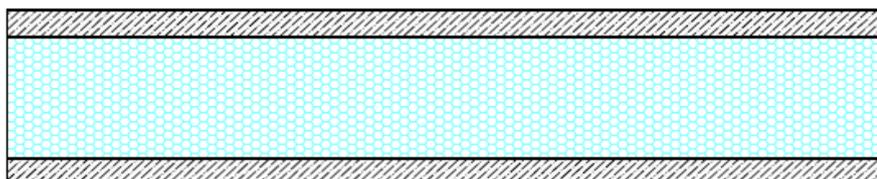

Made: 17.03.14			Draw.: HMN
Revised:	21.11.2024		Draw.: HMN