



one Door
endless
designs

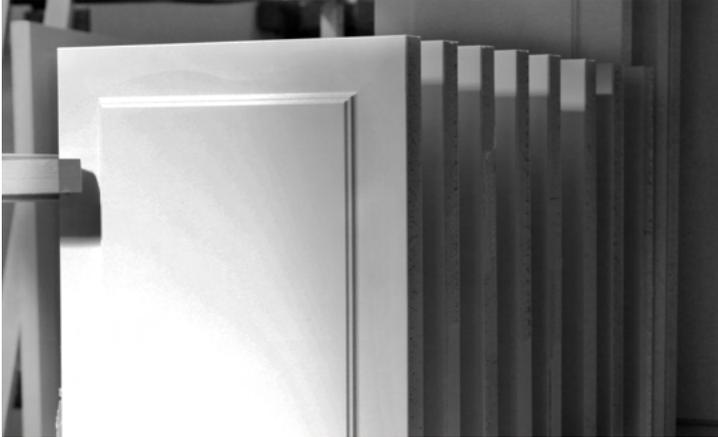

Insulated Timber and Aluminium Panels

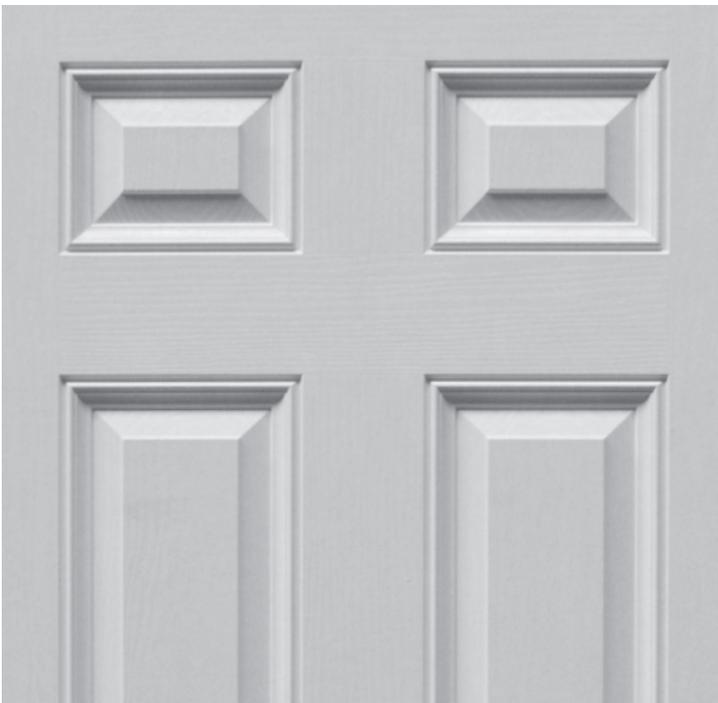

Flush panels for paint and stain.

Panels for grooves.

Solid timber for raised & fielded panels.

Insulated for low U-Values.



O.H. Industri A/S
Smedevej 17
7430 Ikast
Denmark

T: +45 9725 1200
sales@oh-industri.dk
www.oh-industri.com

Product Data

one Door
endless
designs

Specification		Thickness mm	U-Value W/m ² K	Core material	Weight kg/m ²	Max size mm
ChenChen Sliced front veneer on plywood for flush & V-grooves		24	1,67	Polystyrene	5,6	1200 x 2400
		48	0,77	Polystyrene	6,4	1200 x 2400
ChenChen Sliced veneer four layers Stain & all grooves		24	1,62	Polystyrene	6,4	1200 x 2400
		48	0,76	Polystyrene	7,2	1200 x 2400
Sapele Sliced front veneer on plywood for flush & V-grooves		24	1,67	Polystyrene	6,3	1200 x 2400
		48	0,77	Polystyrene	7,1	1200 x 2400
Oak Sliced front veneer on plywood for flush & V-grooves		24	1,69	Polystyrene	6,0	1200 x 2400
		48	0,77	Polystyrene	6,8	1200 x 2400
HDF 4mm HDF & 4mm HDF		24	1,42	Polystyrene	8,3	1280 x 2100
		48	0,71	Polystyrene	9,1	1280 x 2100
HPL Compact Laminate 4mm HPL board		24	1,49	Polystyrene	11,3	1820 x 2080
		48	0,73	Polystyrene	12,1	1820 x 2080
MDF 12 mm MDF exterior & 12 mm MDF exterior		40	1,21	Polystyrene	18,0	1200 x 2400
		45	1,03	Polystyrene	18,2	1200 x 2400
ALU/ALU 1,5 mm ALU, power coated 1,5 mm ALU, power coated		24	1,27	Polystyrene	8,8	1500 x 3000
ALU/HDF 1,5 mm ALU, power coated 4 mm HDF		28	1,15	Polystyrene	8,7	1280 x 2100